

Voltage and Current Mode Filter Realizations using Active Devices

Dr. T. S. Rathore, FIETE

G-803, Country Park, Dattapada Road, Borivali (East), Mumbai 400 066, Maharashtra, India
tsrathor@ee.iitb.ac.in

Abstract -- Two circuits employing one current conveyor (either CCII+ or CCII-) for realizing various second and first order filters are proposed. It is shown that minimum four (three) RC elements are required to realize second order (first order) filters.

Keywords: All-pass filters, Current conveyors, Voltage mode filters, Current mode filters

I. INTRODUCTION

THERE are many circuits reported by the researchers [1]-[28] [30]-[33] in the past for realizing all-pass (AP) filters. Some of them are passive and active, some are first and second order, some are voltage mode and current mode, some are the special cases of more general circuit. They had selected the particular circuit and chosen the values. In this paper, *some of these filters are derived logically from two general circuits using a single current conveyor*. Second order filters are derived using 1 capacitor and 2 resistors or 2 capacitors and 1 resistor, while first order filters are derived using 1 capacitor and 2 resistors or 2 capacitors and 1 resistor.

II. FILTER REALIZATIONS

2.1 Second order filters

Circuit A: Consider the circuit A shown in Fig. 1 where CC II+ is a current conveyor with the following terminal characteristic [1].

$$V_X = V_Y, I_Y = 0, I_Z = I_X \quad (1)$$

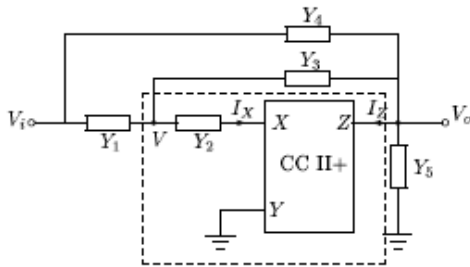


Figure 1. Circuit A.

Its voltage transfer function is given by

$$T(s) = \frac{Y_1 Y_4 + Y_2 Y_4 + Y_3 Y_4 - Y_1 Y_2 + Y_1 Y_3}{Y_1 Y_4 + Y_2 Y_4 + Y_3 Y_4 + Y_1 Y_5 + Y_2 Y_5 + Y_3 Y_5 + Y_1 Y_3 + 2Y_2 Y_3} \quad (2)$$

From Fig. 1, it is obvious that Y_5 cannot be ∞ , otherwise the output will be grounded. Assuming that each admittance consists of a single component, *it can be either a resistor or a capacitor*. Note that when $Y_3 = 0$ ($Y_1 = \infty$), Y_1 and Y_2 (Y_3 and Y_4) come in series (parallel). they can be replaced by the equivalent admittance $Y_a = Y_1 Y_2 / (Y_1 + Y_2)$, $Y_b = Y_3 + Y_4$. Thus, Y_a (Y_b) can have one resistor and one capacitor in series (parallel). Therefore, the interchange of the resistor and the capacitor in Y_a and/or Y_b does not give a new circuit. Since all the terms in the numerator and the denominator are product of two admittances, we can have the highest power of s as 2. Therefore, *it is not possible to realize filters with order greater than 2*. We are looking for filters which require minimum number of capacitors N_C and minimum number of total passive components N . For second order filters, $N_C = 2$. Therefore, we can choose *two admittances as capacitors and the remaining may be resistors*. Only Y_5 can have a capacitor grounded. However, Y_5 does not appear in the numerator, we cannot generate s^2 terms with Y_5 as a capacitor. Therefore, *this configuration cannot realize any capacitor grounded*. Now Y_5 can only be a resistor. To generate a s^2 (s^0) terms in both the numerator and the denominator, we must have the product of two capacitances (resistances) and these product terms must be present both in the numerator and the denominator. To reduce N , there are many choices: Any one product of admittances out of 5 can be capacitors and the remaining can be resistors. An s term is generated by product of a capacitance and a resistance. The negative term $Y_1 Y_2$ in the numerator must be present for realizing all filters other than a band-pass filter. Therefore, Y_1 and/or Y_2 cannot be zero for these filters. Now we proceed further to realize specific second order filters and then the first order filters, followed by current mode filters.

2.1 Second order filters

2.11 Circuit A1: Let

$$Y_1 = G, Y_2 = sC, Y_3 = \frac{G}{m}, \\ Y_4 = nsC, Y_5 = 0, \quad m, n > 0$$

Then, from Eq (2),

$$T_1(s) = \frac{ns^2 + s\left(n + \frac{n}{m} - 1\right)\frac{G}{C} + \frac{G^2}{mC^2}}{ns^2 + s\left(n + \frac{n}{m} + \frac{2}{m}\right)\frac{G}{C} + \frac{G^2}{mC^2}} \quad (3)$$

For BP, the condition is

$$n + \frac{n}{m} = 1.$$

$$\rightarrow m = \frac{n}{1-n}, \quad n < 1. \quad (4)$$

Suitable value of n may be chosen to keep the spread of capacitors in practical limits, and then m may be evaluated from Eq. (3).

For AP, the condition is

$$n + \frac{n}{m} - 1 = -\left(n + \frac{n}{m} + 2\frac{n}{m}\right) \quad (5)$$

$$\rightarrow m = \frac{4}{1-2n}, \quad n < \frac{1}{2}.$$

BR and AP filters are shown in Fig. 2. LP, BP, HP filters cannot be obtained because s^2 and s^0 terms cannot be made 0.

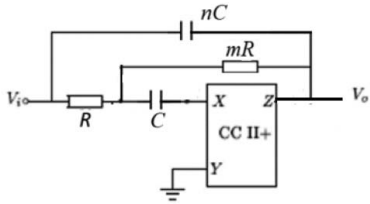


Figure 2. Circuit A1 for BR and AP filters.

Filter type	m
BR	$\frac{n}{1-n}, \quad n < 1$
AP	$\frac{4}{1-2n}, \quad n < \frac{1}{2}$

Circuit A2:Let

$$Y_1 = sC, Y_2 = G, Y_3 = nsC, Y_4 = G/m, Y_5 = 0. \quad (6)$$

Then Eq. (2) gives

$$T_2(s) = \frac{ns^2 + s\left(\frac{n}{m} + \frac{1}{m} - 1\right)\frac{G}{C} + \frac{G^2}{mC^2}}{ns^2 + s\left(\frac{n}{m} + \frac{1}{m} + 2n\right)\frac{G}{C} + \frac{G^2}{mC^2}}$$

Following the similar procedure as above, the results are given in Fig. 3.




Figure 3. Circuit A2 for BR and AP filters.

Filter type	m
BR	$m = n + 1$
AP	$\frac{2(n+1)}{1-2n}, \quad n < \frac{1}{2}$

Circuit A3: Let

$$Y_1 = G, Y_2 = sC, Y_3 = 0, Y_4 = snC + G/m,$$

$$\text{or } \left\{ \begin{aligned} Y_1 &= \infty, Y_2 = \frac{sC}{1+sCR}, \\ Y_3 &= \frac{G}{m}, Y_4 = snC, Y_5 = 0. \end{aligned} \right\} \quad (7)$$

Then

$$T_3(s) = \frac{ns^2 + s\left(\frac{1}{m} + n - 1\right)\frac{G}{C} + \frac{G^2}{mC^2}}{ns^2 + s\left(\frac{1}{m} + n + 2n\right)\frac{G}{C} + \frac{G^2}{mC^2}}$$

Following the similar procedure as above, the results are given in Fig. 4.




Figure 4. Circuit A3 for BR and AP filters.

Filter type	m
Band pass	$m = \frac{1}{n-1}, \quad n < 1$
	$\frac{2}{1-4n}, \quad n < \frac{1}{4}$

Circuit A4:

$$Y_1 = sC, Y_2 = G, Y_3 = G/m, Y_4 = nsC, Y_5 = 0. \quad m, n > 0.$$

$$T_4(s) = \frac{ns^2 + s\left\{n + \frac{n}{m} + \frac{1}{m} - 1\right\}\frac{G}{C} + \frac{G^2}{mC^2}}{ns^2 + s\left\{n + \frac{n}{m} + \frac{1}{m}\right\}\frac{G}{C} + \frac{2G^2}{mC^2}} \quad (8)$$

This circuit will not have the geometric symmetry around the null frequency for BR filter, and will not give any other standard filter. The results are given in Fig. 5.




Figure 5. Circuit A4 for BR and AP filters.

Filter type	m
BR	$\frac{1+n}{1-n}, \quad n < 1$

Circuit A5: Let

$$Y_1 = G, Y_2 = sC, Y_3 = 0, Y_4 = nsC, Y_5 = G/m \quad (9)$$

$$T_5(s) = - \frac{ns^2 + s(n-1)\frac{G}{C}}{ns^2 + s\left(n + \frac{1}{m}\right)\frac{G}{C} + \frac{G^2}{mC^2}} \quad (10)$$

This is an HP filter function when $n=1$. The circuit is shown in Fig. 6 where m is chosen as 1 to have equal valued resistors.

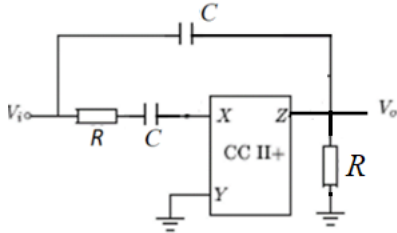


Figure 6. Circuit A5 for high-pass filter.

Circuit A6: Let

$$Y_1 = G, Y_2 = 0, Y_3 = sC, Y_4 = nsC, Y_5 = G/m.$$

$$T_6(s) = - \frac{ns^2 + s(n-1)\frac{G}{C}}{\left\{ns^2 + s\left(n + 1 + \frac{1}{m}\right)\frac{G}{C} + \frac{G^2}{mC^2}\right\}} \quad (11)$$

This function represents an HP function when $n=1$. The circuit is shown in Fig. 7 where m is chosen as 1 to have equal valued resistors.




Figure 7. Circuit A6 for high-pass filter.

Circuit A7: Let

$$Y_1 = \frac{sGC}{sC+G}, Y_2 = \infty, Y_3 = (nsC + G/m), Y_4 = 0, Y_5 = 0. \quad (12)$$

$$T_7(s) = - \frac{sG/C}{2n \left\{s^2 + s\left(1 + \frac{1}{nm}\right)\frac{G}{C} + \frac{G^2}{mnc^2}\right\}}$$

This is a band-pass function. The circuit is shown in Fig. 8. For unity gain at the resonance frequency, the condition is

$$\left(1 + \frac{1}{nm}\right) = 1 \quad (13)$$

$$m = \frac{2}{1-2n}, \quad n < \frac{1}{2}.$$




Figure 8. Circuit A7 for band-pass filter.

Circuit B:

Consider the circuit B shown in Fig. 9 where CC II- has the terminal characteristic [2].

$$V_X = V_Y, I_Y = 0, I_Z = -I_X. \quad (14)$$

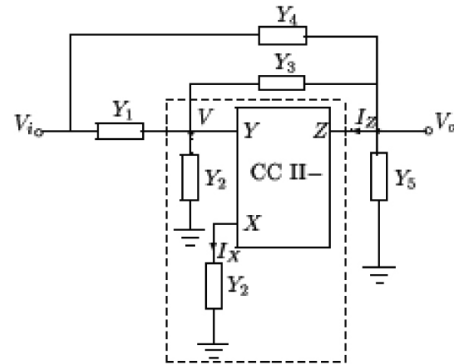


Figure 9. Circuit B.

From Fig. 9, we note the following.

1. It has 6 admittances, two of them are Y_2 , and three of them are grounded. Thus, there is a possibility of having grounded capacitor(s).
2. It has the same transfer function as given by Eq. (2). Hence the same treatment is possible as given above for circuit 1. However, due to two Y_2 , it will require a greater number of elements. In case $Y_1 = \infty$, Y_2 connected at Y gets

directly connected to the voltage source, therefore, it can be eliminated. In such cases, the number of elements will be the same as in Circuit 1. To conserve space, we are not showing explicitly these circuits.

More filter circuits

(a) By RC:CR transformation: Since each of the above circuits obtained has two capacitors and two resistors, RC:CR transformation will convert them into different circuits but the same number of resistors and capacitors.

(b) Since all the realizations of $T(s)$ obtained from circuit A have virtual ground, a new function can be obtained by interchanging the input and ground terminals [2] given by

$$1 - T(s) = \frac{Y_1 Y_5 + Y_2 Y_5 + Y_3 Y_5 + Y_1 Y_2}{Y_1 Y_4 + Y_2 Y_4 + Y_3 Y_4 + Y_1 Y_5 + Y_2 Y_5 + Y_3 Y_5 + 2Y_2 Y_3 + Y_1 Y_3} \quad (15)$$

Since there is no negative term present in the numerator, only band-pass filters can be realized. For example, the realization shown in Fig. 4 reduces, after interchanging the input and ground terminals, to band-pass filter shown in Fig. 10.




Figure 10. Band-pass filter.

Filter type	m
Band pass	$m = \frac{1}{n-1}, n < 1$
	$\frac{2}{1-4n}, n < \frac{1}{4}$

First order circuits

It will be shown in the next section that the minimum number of elements required for a first order filter is 3: $(2R + 1C)$ or $(1R + 2C)$. Therefore, one has to either remove one capacitor or 1 resistor from the second order filters.

Circuit B1:

Remove the capacitor nC , i.e., $nC = 0$ from Circuit 11. Thus, we get

$$Y_1 = G, Y_2 = sC, Y_3 = G/m, Y_4 = Y_5 = 0 \quad (16)$$

Then from Eq. (2)

$$T_8(s) = - \left[\frac{S - \frac{G}{mC}}{\frac{2}{m}S + \frac{G}{mC}} \right]$$

For all-pass filter, the condition is $m = 2$. The circuit is shown in Fig. 11(b)(i).

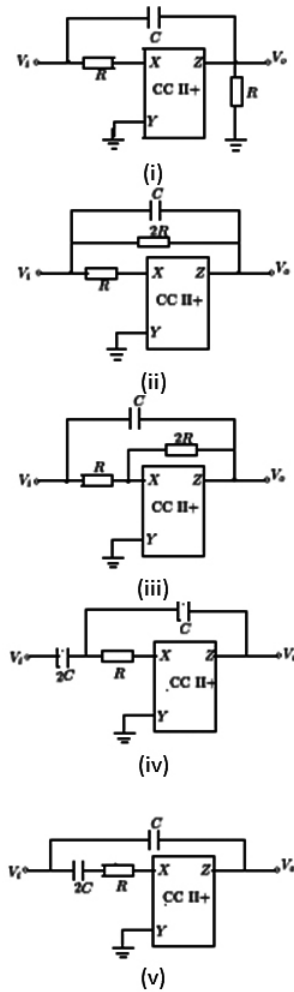
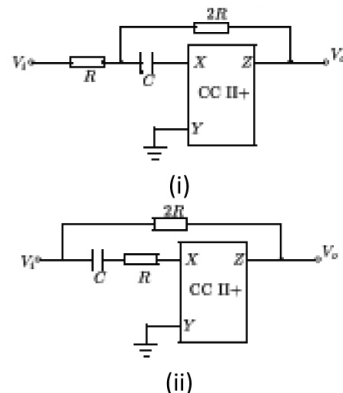


Figure 11 (a). First order AP filters with positive gain.



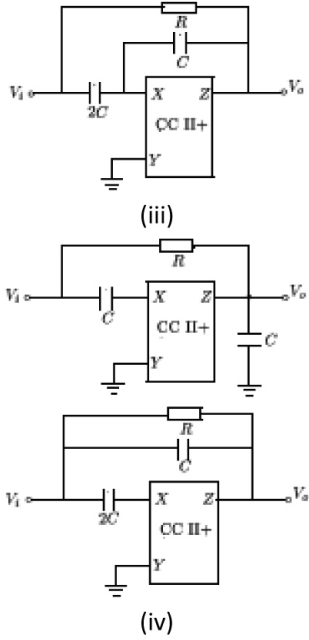


Figure 11 (b). First order AP Filters with negative gain

Circuit B2: Let

$$Y_1 = G, Y_2 = \infty, Y_3 = G/m, Y_4 = sC.$$

From Eq. (2), we get

$$T_9(s) = \left[\frac{s - \frac{G}{C}}{s + \frac{2G}{mC}} \right] \quad (17)$$

For all-pass filter, the condition is $m = 2$. The circuit is shown in Fig. 9(a)(iii).

Circuit B3:

Let

$$Y_1 = G, Y_2 = sC, Y_3 = 0, Y_4 = G/m.$$

Then, from Eq (2),

$$T_{10}(s) = \frac{(1/m - 1)s - G/Cm}{(1/m)s + G/Cm}.$$

LP filter: Condition is

$$m = 1$$

Circuit B4: Let

$$Y_1 = sC, Y_2 = G, Y_3 = 0, Y_4 = nC, Y_5 = 0$$

$$T_{11}(s) = \frac{ns - (1 - n)G/C}{ns + nG/C}$$

(i) HP filter: Condition is

$$n = 1$$

(ii) AP filter: Condition is

$$n = 1/2.$$

Circuit B5: Let

$$Y_1 = sC, Y_2 = G, Y_3 = G/m, G_4 = 0, Y_5 = 0. \text{ Then}$$

$$T_{12}(s) = \frac{s(1 - m)}{s + \frac{2G}{Cm}}.$$

It is a high-pass filter, when $m < 1$.

Similarly, various first order filters are obtained from the second order AP filters from circuit A. Only first order all-pass filters are shown in Fig. 11 and the conditions of realizations are summarized in Table 1.

Similarly, additional 8 filters are obtained from circuit B and are shown in Fig. 12.

Note the following.

1. The circuits shown in Fig. 11(a) have positive gain and those shown in Fig. 11(b) have negative gain.
2. Positive gain filters of N th order, when N is odd, can be converted into negative gain filters by RC:CR transformation [5]. However, for N even, the sign of $T(s)$ remains unchanged. Thus $1C+2R$ filters are converted into $2C+1R$ filters.
3. All the first order filters of Figs 11 and 12 require 3 passive elements except that shown in Fig. 11(a)(iii) and 11(b)(i) which require 4 elements because R and C in these figures are not connected directly across an ideal voltage source. Only CC II- filters of Figs.12(b)(i, ii, iii) have all the capacitor(s) grounded. This situation is especially suitable for integrated circuit technology.
4. All those voltage realizations, which have a virtual ground, can be converted into current mode realizations by changing Y and Z terminals of the current conveyors [29]. Current mode realizations using other devices (FTFN, CFA, OA, can be seen in [29].

Table 1: Elements for first order all-pass filters given in Fig. 11

Figure No	Y_1	Y_2	Y_3	Y_4	Y_5
Positive Gain					
11a(i)	∞	G	sC	0	G
11a(ii)	∞	G	$G/2$	sC	0
11a(iii)	G	∞	$G/2$	sC	0
11a(iv)	sC	G	$sC/2$	0	0
11a(v)	sC	G	0	$sC/2$	0
Negative Gain					
11b(i)	G	sC	$G/2$	0	0
11b(ii)	sC	G	0	$G/2$	0
11b(iii)	sC	∞	$sC/2$	G	0
11b(iv)	sC	∞	0	G	sC
11b(v)	∞	sC	$sC/2$	G	0

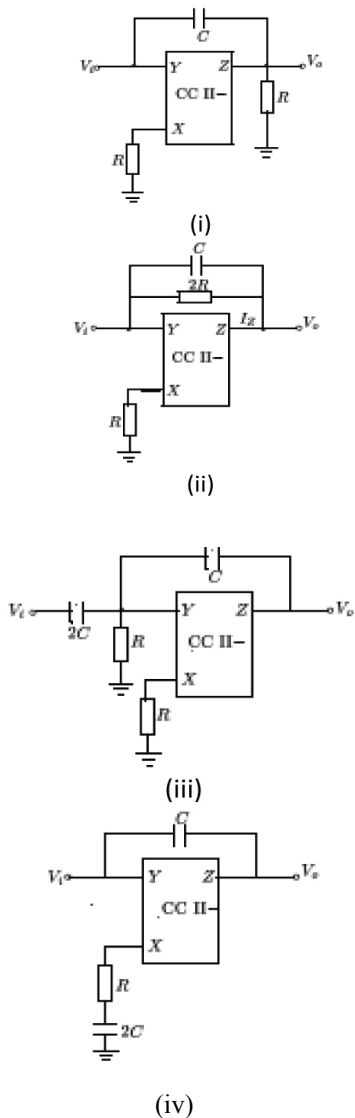


Figure 12 (a): First order all-pass filters with positive gain.

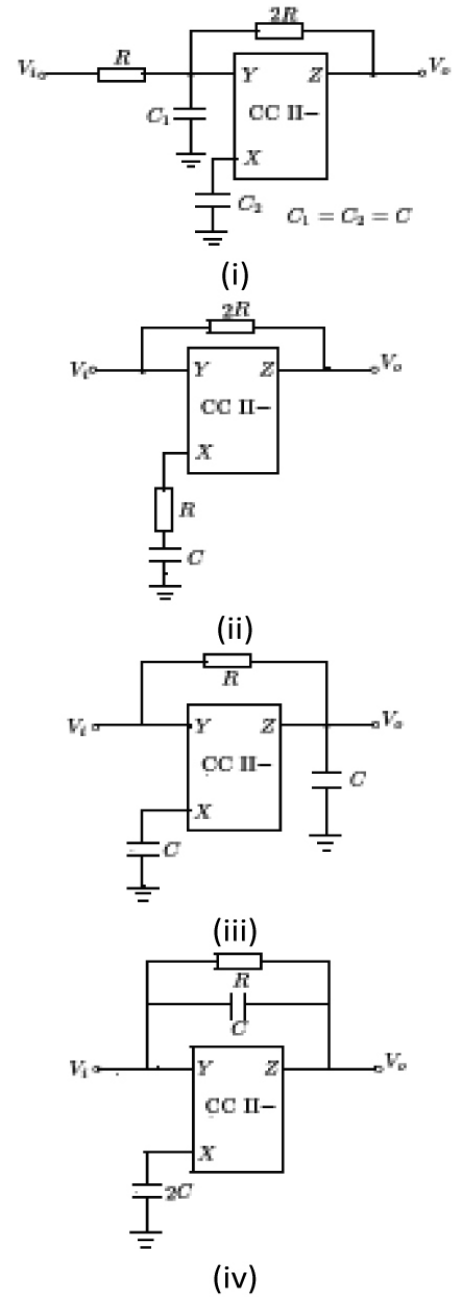


Figure 12 (b). First order all-pass filters with negative gain.

3. Minimal all-pass realizations

First order all-pass filter can be considered as a special case of $T(s) = (s - \tau_1)/(s + \tau_2)$ when $\tau_1 = \tau_2$. Since T' has a positive real zero, it cannot be realized with only passive elements. Thus, at least one active element is required. Further, since T' is of first order, at least one capacitor is required. Finally, since $\tau_{1,2}$ have the dimensions of time, they must represent two different RC products, and therefore, at least one capacitor (resistor) and two resistors (capacitors) are required to give $\tau_{1,2} = CR_{1,2} (C_{1,2}R)$. Thus, $(1C, 2R) (2C, 1R)$ and one active element constitute the minimal realization of T' . Since, $\tau_1 = \tau_2$ in (8) does not reduce the

number of internal critical frequencies of T , the same number of passive and active elements also constitute the minimal realization of T . Therefore, all the first order all-pass filters shown in Figs 3 and 5, except that shown in Figs 5(a)(iii) and 5(b)(i), are minimal.

IV. CONCLUSION

Two circuits using a single current conveyor (CCII+ or CII-) as active devices are introduced for realizing several second and first order filters. It has been shown that C , $2R$ or $2C$ $1R$, and 1 active element constitute minimal 1st order realizations. Other realizations using different active devices, such as FTFN, CFA, OA etc., by input and ground interchange, by RC:CR transformation, and voltage mode to current mode transformation are possible. We have not attempted to provide experimental results as they have been tested by several authors.

REFERENCES

- [1] M.T. Abuelma'atti, "Cascadable current mode filters using single FTFN", *Electron. Lett.*, vol. 32, pp. 1457-1458, 1996.
- [2] C. Cakir, U. Cam and O. Cicekoglu, "Novel all pass filter configuration employing single OTRA", *IEEE Trans Circuits Syst. II, Analog and Digital Signal processing*, vol. 52, pp. 122-125, 2005.
- [3] M. Higashimura and Y. Fukui, "Realization of current mode all-pass networks using a current conveyor", *IEEE Transactions on Circuits and Systems*, vol. 37, pp. 660-661, 1990.
- [4] M. Higashimura, "Current-mode all-pass filter using FTFN with grounded capacitor", *Electron Lett.*, vol. 27, pp. 1182-1183, 1991.
- [5] J.W. Hong, C.L. Hou, C.M. Chang, W.Y. Chung, H.L. Liu and C.T. Lin, "High output impedance current-mode first-order all-pass networks with four grounded components and two CCII's", *Int. J. of Electron.*, vol. 93, pp. 613-621, 2006.
- [6] Horng, Jiun-Wel, Hou, Chun-Li, Hsu, Chih-Hou, Yang, Dun-Yih, Hp, Min-Jie, "Low input and high output impedance current-mode first order all pass filter employing grounded passive components", *Int. J. Circuits and Syst.*, vol. 3, pp. 176-179, 2012
- [7] A. U. Keskin and D. Biolk, "Current mode quadrature oscillator using current differencing trans-conductance amplifier", *IEE Proc. Circuits Devices Syst.*, vol. 153, pp. 214-218, 2006.
- [8] A. Khan A and S. Maheshwari, "A simple first-order all-pass section using a single CCII", *Int. J. Electron.*, vol. 87, pp. 303-306, 2000.
- [9] M.A. Khan, P. Beg and M.T. Ahmed, "First-order current mode filters and multiphase sinusoidal oscillators using CMOS MOCCII's", *The 18th International Conference on Microelectronics (ICM)*, pp 146-149, 2006, vol. 32, pp. 119-126, 2007.
- [10] S. Kilinc S and U. Cam, "Operational trans-conductance amplifier based first order all-pass filter with an application", *Proc IEEE Int Midwest Symp, Circuits Syst.*, Hiroshima, Japan, pp. 65-68, 2004.
- [11] S. Kilinc and U. Cam, "Current mode first-order all-pass filter employing single current operational amplifier", *Analog Integrated Circuits and Signal Processing*, vol. 41, pp. 47-53, 2004.
- [12] S.I. Liu and J. L. Lee, "Insensitive current/voltage filters using FTFNs". *Electron. Lett.*, vol. 32, pp. 1079-1080, 1996.
- [13] S.I. Liu and C. Hwang, "Realization of current-mode filters using single FTFN", *Int. J. Electron.* vol. 82, pp. 499-502, 1997.
- [14] S. Maheshwari S. and I.A. Khan, "Novel first order all-pass sections using a single CCIII", *Int. J. Electron.*, vol. 88, pp. 773-778, 2001.
- [15] S. Maheshwari, and I.A. Khan, "Novel first order all-pass filter employing single current operational amplifier", *Analog Integrated Circuits and Signal Processing*, vol. 41, pp. 47-53, 2004.
- [16] S. Maheshwari, "High input impedance VM-APs with grounded passive elements", *IET Circuits, Devices Syst*, vol. 1, no. 1, pp. 72-78, 2007.
- [17] S. Minaei and M.A. Ibrahim, "General configuration for realizing current-mode first order all-pass filter using DVCC", *Int. J. Electron.*, vol. 92, pp. 347-356, 2005.
- [18] J. Mohan, "Single active element based current-mode all-pass filter", *International Journal of Computer Applications* (8875 – 8887), vol. 82, no. 1, pp. 23-27, 2013.
- [19] J. Mohan and S. Maheshwari, "Two active elements based all-pass section suited for current-mode cascading", World Academy of Science, Engineering and Technology, *Int. J. Electrical Engg.*, vol. 7, pp. 1217-1221, 2013.
- [20] T.S. Rathore., "Digitally-controlled all-pass and notch filters", *Inst Engrs(I)*, vol. TE 31, pp. 28-29, 1985.
- [21] T.S. Rathore, "Realizations of current transfer functions using current differencing trans-conductance amplifier", *Circuits, Systems, and Signal processing*, DOI 10.1007/s00034-019-01036-x.
- [22] T.S. Rathore, "A systematic current and voltage transfer function realizations with a single active element", *IOSR Journal of Electrical and Electronics Engineering*, p-ISSN: 2320-3331, vol. 14, no. 6, pp. 79-89, 2019.
- [23] T.S. Rathore, "Minimal realizations of first order all-pass functions", *Inst Engrs(I)*, vol. TE 29, pp. 124-125, 1983.
- [24] T.S. Rathore, "Passive and active realizations of RC all-pass voltage transfer functions", *Inst Engrs(I)*, vol. 54, ET-3, pp. 128-130, 1974.
- [25] T.S. Rathore and U.P. Khot, "Single FTFN realization of current transfer functions", *IETE J Research*, vol. 51, pp. 193-199, 2005.
- [26] T.S. Rathore and S.M. Dasgupta, "A simple design for an all-pass filter", *Int J Electron*, vol. 39, pp. 93-96, 1975.
- [27] T.S. Rathore and S.M. Dasgupta, "Current conveyor realization of transfer functions", *Proc IEE*, vol. 122, pp. 1119-1120, 1975.
- [28] T.S. Rathore and U.P. Khot, "Single OTRA realization of transfer functions", *Inst. Engrs.(India), J. ET*, vol. 89, pp. 33-38, 2008.

- [29] T.S. Rathore and U.P. Khot, "Voltage Mode-to-Current Mode Transformation", *International Journal of Engineering and Technology*, vol. 4 no 5, Oct-Nov 2012.
- [30] A.M. Soliman, "New current mode filters using current conveyors", *Int. J. Electron. and Comm., AEU*, vol. 51, pp. 275-278, 1997.
- [31] A.M. Soliman, "Realization of an all-pass transfer function using second generation current conveyor", *IEEE Proc.*, vol. 68, p. 1035, 1980.
- [32] T.S. Rathore, "Realizations of voltage transfer functions using DVCCs", *Circuits and Systems*, vol. 9, pp. 141-147, 2018.
- [33] A. Toker, S. Ozoguz, O. Cicekoglul and C. Acar, "Current mode all-pass filter suing using a current differencing buffered amplifier and a new high- Q band-pass filter configuration", *IEEE Trans Circ and Syst. II: Analog and Digital Signal Processing*, vol. 47, pp. 949-954, 2000.



Dr. T S Rathore, received B Sc (Engg), ME, and PhD (Electrical Engineering) all from Indore University, Indore. Served SGSITS, Indore (1965-1978), IIT Bombay (1978-2006), and St. Francis Institute of Technology, Borivali (2006-2014) as Dean (R&D). and a visiting professor at IIT Goa in July 2017-2019. He was a post-doctoral fellow (1983-85) at the Concordia University, Canada and a visiting researcher at the University of South Australia, Adelaide (March-June 1993). He was an ISTE visiting professor (2005-2007).

Published and presented over 225 research papers. He has authored the book *Digital Measurement Techniques*, Narosa Publishing House, 1996 and *Alpha Science International Pvt Ltd.*, UK, 2003 and translated in Russian language in 2004 and Hindi in 2020. He is the coauthor of (a) revised 3rd Edition of *Network Analysis with M E Van Valkenburg*, Pearson India Education Services Pvt Ltd, India 2019 and (b) *अंकीय मापन तकनीकें*, Rajsthaan Hindi Granth Academy, Jaipur, India, 2020.

He was the Guest Editor of the special issue of *Journal of IE on Instrumentation Electronics* (1992). He is a member on the editorial boards of *ISTE National Journal of Technical Education* and *IETE Journal of Education*. Prof. Rathore is a Life Senior Member of IEEE, Fellow of IETE and IE (India), Member of ISTE, Instrument and Computer Societies of India. Served Mumbai Centre as Secretary, Vice-Chairman and Chairman. He received IEEE Silver Jubilee Medal, ISTE U P Government National Award (2002) and Maharashtra State National Award (2003), IETE M N Saha Memorial Award, Prof S V C Aiya Memorial Award, BR Batra Memorial Award, Prof K Sreenivasan Memorial Award, K S Krishnan Memorial Award, Hari Ramji Toshniwal Gold Medal Award, and best paper awards published in *IETE J of Education* (2011, 2013, 2018). Currently, he is an independent researcher with interests in Circuit Theory, Electronic Instrumentation, Signal Processing, SC Filters, Analog and Digital Circuits.